

NP VOLTS	230/460	MAX SAFE RPM	3900	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	63/32	Base Volt	460	R1	0.156	X1	0.866
HP	25HP	NL AMPS	13.8	R2	0.109	X2	0.853
BASE SPEED	1180	Slips (Hz)	0.80			XM	19.100
PHASE/HZ	3/60	WK ² (lb-ft ²)	11.5				

Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1184	25.0	111.0	460	60	31.9
Max Speed	1775	25.0	74.1	460	90	30.7
Min Speed	0	0.0	111.0	21.89	0.80	31.9

Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1199	0.0	0.0	460	60	13.8
1/4	1195	6.3	27.6	460	60	15.6
1/2	1192	12.6	55.4	460	60	19.7
3/4	1188	18.8	83.1	460	60	25.4
Full Load	1184	25.0	111.0	460	60	31.9
O/L	1164	50.1	226.0	460	60	64.5

Blower Data	Volts	Ph/Hz	FL Amps	LR Amps	Frame	CFM

Remarks: Calculated Data
Vector PWM Inverter Duty




DR BY BR
 CK BY
 APP BY BR
 DATE 3/28/2017

A-C MOTOR **12WGY116**
 PERFORMANCE
 CURVES

NP VOLTS	230/460	MAX SAFE RPM	3900	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	63/32	Base Volt	460	R1	0.156	X1	0.866
HP	25HP	NL AMPS	13.8	R2	0.109	X2	0.853
BASE SPEED	1180	Slips (Hz)	0.80			XM	19.100
PHASE/HZ	3/60	WK2 (lb-ft)	11.5				

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

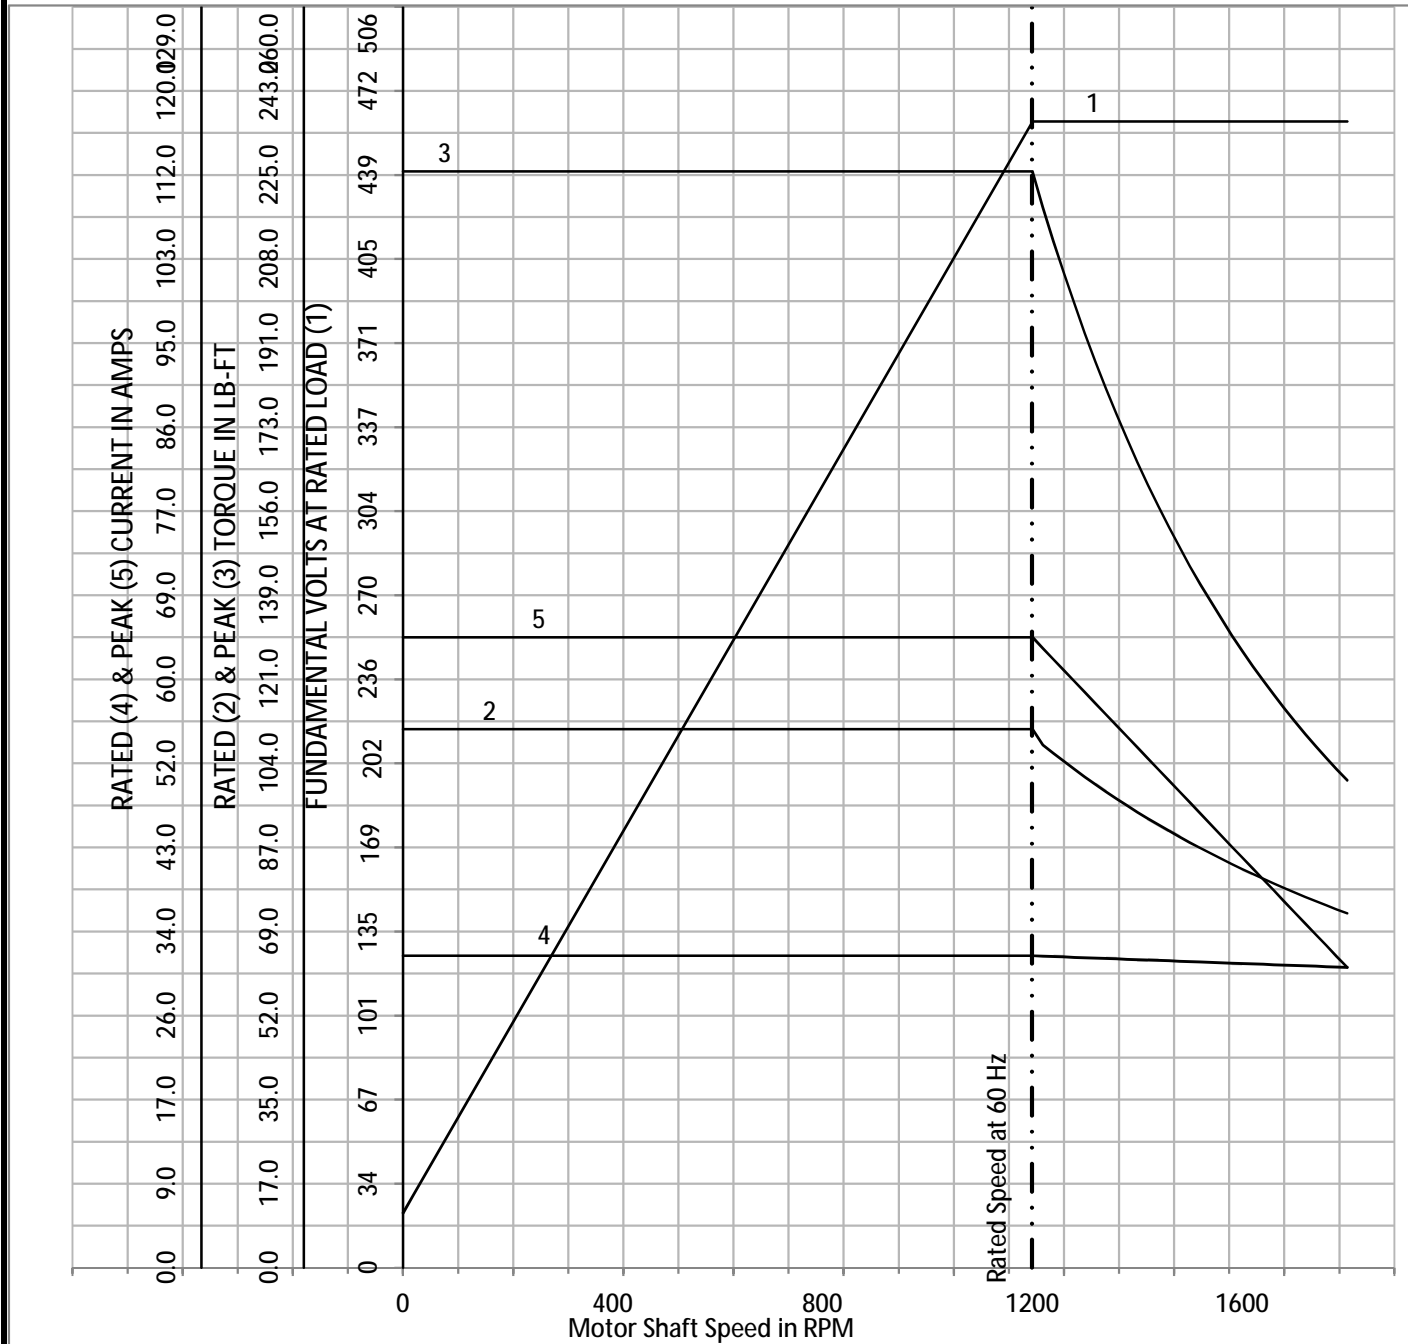

Calculated Data

Data Valid For Nameplate Speed Range only




DR BY BR
 CK BY
 APP BY BR
 DATE 3/28/2017

A-C MOTOR **12WGY116**
 PERFORMANCE
 CURVES

NP VOLTS	230/460	MAX SAFE RPM	3900	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	63/32	Base Volt	460	R1	0.156	X1	0.866
HP	25HP	NL AMPS	13.8	R2	0.109	X2	0.853
BASE SPEED	1180	Slips (Hz)	0.80			XM	19.100
PHASE/HZ	3/60	WK2 (lb-ft ²)	11.5				

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

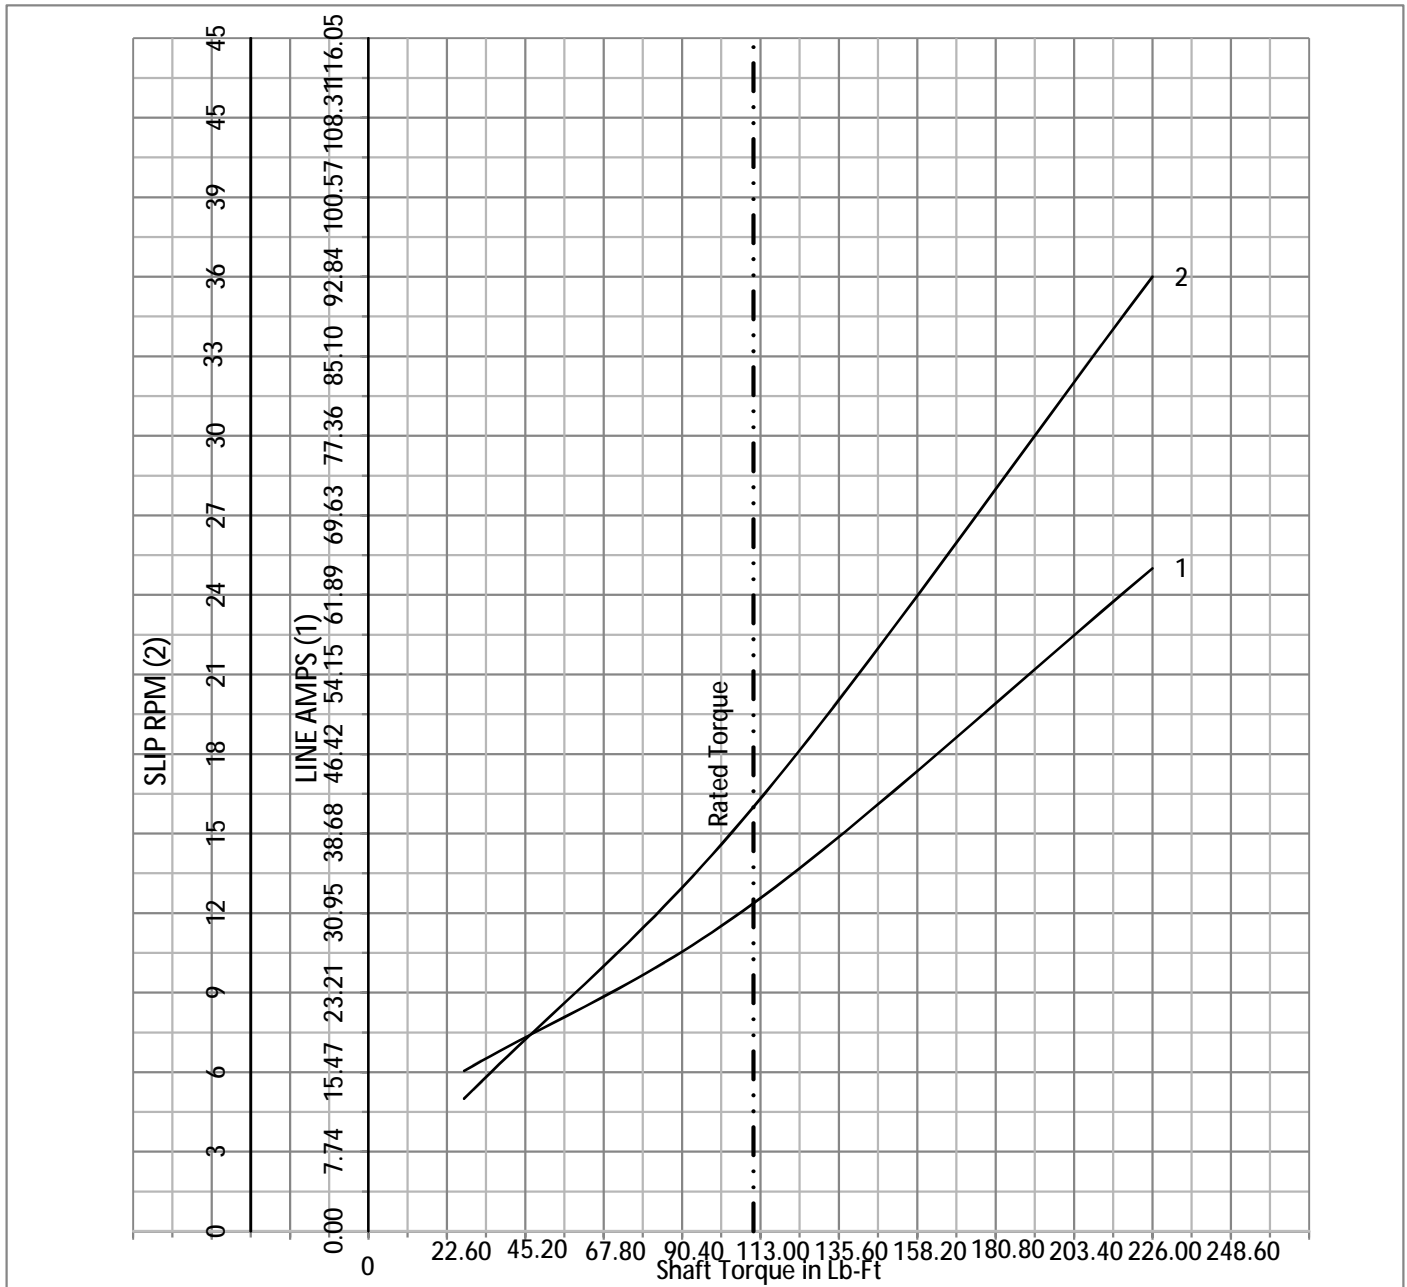

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY BR
 CK BY
 APP BY BR
 DATE 3/28/2017

A-C MOTOR **12WGY116**
 PERFORMANCE
 CURVES