

REL S.O.	ZDVSCP3661T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	182TC	AMPS	4.1	MAX SAFE RPM	5400	(AT BASE RATING, 25 <sup>0</sup> C)			
HP	3	DUTY	CONT	In (AMPS)	2.1	R1	2.0800	X1	5.4900
BASE SPEED	1755	S.F.	1.0	P.F. @NL/FL	6/77	R2	1.4800	X2	4.5800
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/F	WK <sup>2</sup> (lb-ft <sup>2</sup> )	0.298			XM	119.3000

### Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1757	3.0	9.06	460	60	4.10
Max Speed	2630	3.0	6.04	460	90	3.90
Min Speed	0	0.0	9.06	33.37	1.43	4.10

### Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1799	0.0	0.00	460	60	2.10
1/4	1789	0.8	2.31	460	60	2.34
1/2	1779	1.5	4.54	460	60	2.79
3/4	1769	2.3	6.80	460	60	3.39
Full Load	1757	3.0	9.06	460	60	4.10
O/L	1700	6.5	20.20	460	60	8.50

### Blower Data

Volts	Ph/Hz	FL Amps	LR Amps	Frame	CFM

Remarks: Calculated Data  
Vector PWM Inverter Duty



DR BY Micheal Williamson  
 CK BY Micheal Williamson  
 APP BY Micheal Williamson  
 DATE 8/20/2012


A-C MOTOR  
PERFORMANCE CURVES

06H932X181Z1

ISSUE DATE 8/20/2012

REL S.O.	ZDVSCP3661T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	182TC	AMPS	4.1	MAX SAFE RPM	5400	(AT BASE RATING, 25 <sup>0</sup> C)			
HP	3	DUTY	CONT	In (AMPS)	2.1	R1	2.0800	X1	5.4900
BASE SPEED	1755	S.F.	1.00	P.F. @NL/FL	6/77	R2	1.4800	X2	4.5800
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/F	WK <sup>2</sup> (lb-ft <sup>2</sup> )	0.298			XM	119.3000

Vector PWM Inverter Duty  
Variable Speed AC Motor Curves

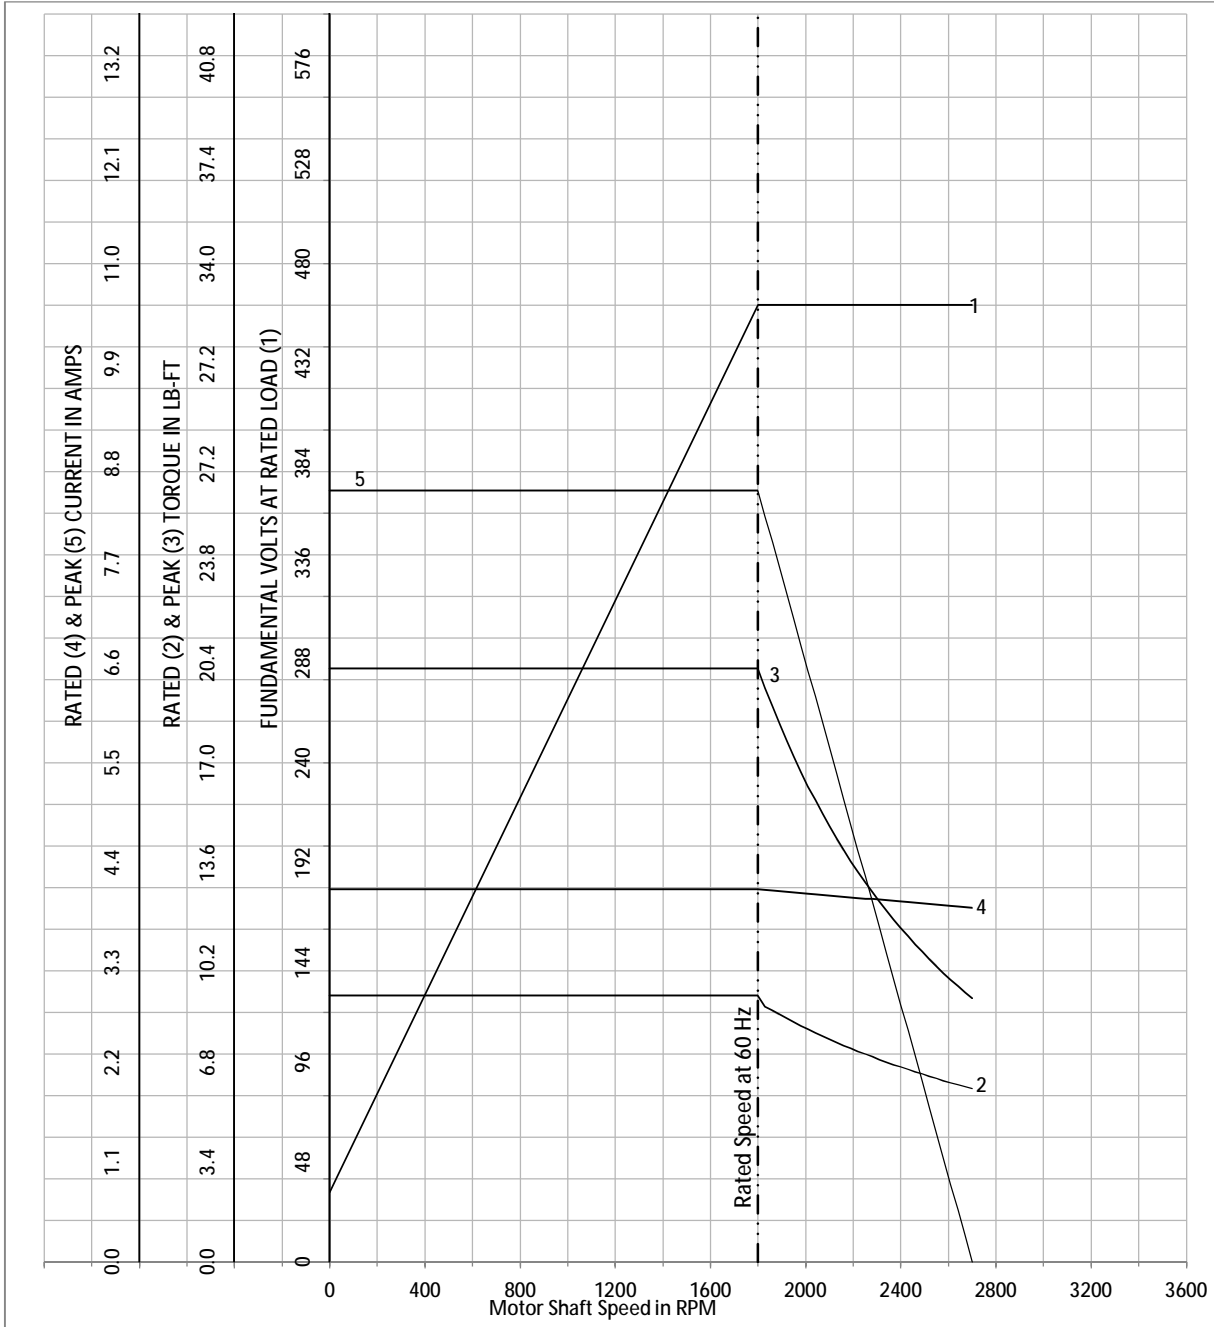

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY Micheal Williamson  
 CK BY Micheal Williamson  
 APP BY Micheal Williamson  
 DATE 8/20/2012


A-C MOTOR PERFORMANCE  
CURVES

06H932X181Z1

SH 1 of 2  
ISSUE DATE 8/20/2012

REL S.O.	ZDVSCP3661T	VOLTS	460	ENCLOSURE	TEFC	WYE CONN EQ CKT OHMS PER PHASE			
FRAME	182TC	AMPS	4.1	MAX SAFE RPM	5400	(AT BASE RATING, 25 <sup>0</sup> C)			
HP	3	DUTY	CONT	In (AMPS)	2.1	R1	2.0800	X1	5.4900
BASE SPEED	1755	S.F.	1.00	P.F. @NL/FL	6/77	R2	1.4800	X2	4.5800
PHASE/HZ	3/60	AMB <sup>0</sup> C/INSUL	40/F	WK <sup>2</sup> (Lb-Ft <sup>2</sup> )	0.298			XM	119.3000

Vector PWM Inverer Duty  
Variable Speed AC Motor Curves

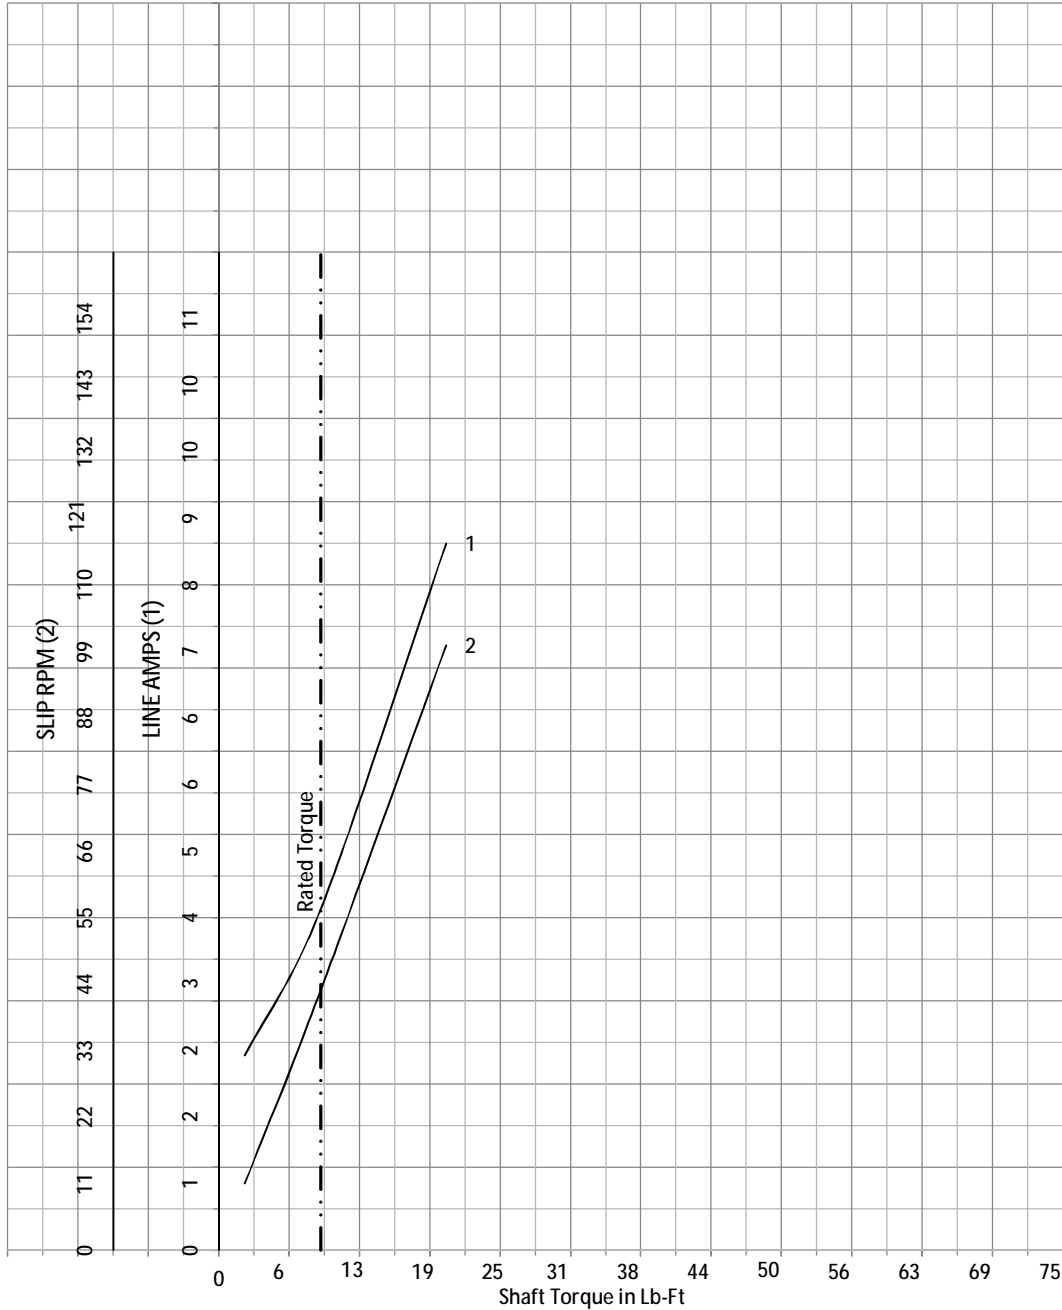

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY Micheal Williamson  
CK BY Micheal Williamson  
APP BY Micheal Williamson  
DATE 8/20/2012

A-C MOTOR  
PERFORMANCE CURVES

06H932X181Z1

SH 2 of 2  
ISSUE DATE 8/20/2012