

**BALDOR • RELIANCE**

---

# Customer information packet

## EHM2524T

15HP, 1180RPM, 3PH, 60HZ, 284T, 4038M, OPSB, F1

## Specifications

Enclosure	OPSB
Frame	284T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	20.500 A @ 460.0 V 41.000 A @ 230.0 V 42.000 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	20.5 a
Insulation Class	F

## Part detail

Revision	M
Type	AC
Mech. spec.	40J098
Base	
Status	PRD/A
Elec. spec.	40WGX775
Layout	40LYJ098
Eff. date	01-31-2025
CD Diagram	CD0005
Poles	06
Leads	9#10
Proprietary	False
Created date	10-22-2013

Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4038M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.81 IN
Power Factor	75
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1180 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

**Nameplate**

<b>NP2094E06B03</b>										
<b>CAT.NO.</b>	EHM2524T									
<b>SPEC.</b>	40J098X775G1									
<b>HP</b>	15									
<b>VOLTS</b>	230/460									
<b>AMPS</b>	41/20.5									
<b>RPM</b>	1180									
<b>FRAME</b>	284T	<b>HZ</b>	60	<b>PH</b>	3					
<b>SER.F.</b>	1.15	<b>CODE</b>	G	<b>DES</b>	B	<b>CL</b>	F			
<b>NEMA-NOM-EFF</b>	91.7	<b>PF</b>	75							
<b>RATING</b>	40C AMB-CONT									
<b>CC</b>	010A	<b>USABLE AT 208V</b>						N/A		
<b>DE</b>	6311	<b>ODE</b>	6309							
<b>AUTO</b>		<b>MANUAL</b>		<b>NONE</b>						
<b>ENCL</b>	OPSB	<b>SN</b>								
<b>BLANK</b>										

## Parts list

Part number	Description	Quantity
SA271171	SA 40J098X775G1	1.000 ea
RA257801	RA 40J098X775G1	1.000 ea
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME ZINC	2.000 ea
HA6017	CAST ADAPTER, 40,42 KOBX	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	2.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
WD1000B25	GND LUG, BURNDY L125HP OR T&B L125HP-BB	1.000 ea
19XW3118G08	.31-18X.50,HEX WSHR HD,TAPTITE 2,GREEN	1.000 ea
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 ea
10CB3001	CONDUIT BOX CAST W/2.500 LEAD HOLE	1.000 ea
19XW3118A12	.31-18 X .75 HEX WASHER HEAD TAPTITE II	2.000 ea
40EP3200A02	STD FREP OPEN 309 BRG	1.000 ea
HW5100A11	W3917-042 WVY WSHR (WB)	1.000 ea
40EP3200B31	PUEP OPEN 311 BRG W/SH GND MTG	1.000 ea
84XN0632J08	#6-32 X .50 SOCK HD, BK OX	2.000 ea
84XN0540J08	5-40 X 1/2" SHCS, BLACK OXIDE	3.000 ea
XY3816A12	3/8-16 FINISHED NUT W/SERRATIONS	8.000 ea
10CB3500SP	CONDUIT BOX LID, CAST	1.000 ea
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 ea
HW2501H28	KEY, 1/2 SQ X 3.250	1.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500bx)4/22	1.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
MG1050G01	CELEROL MEDIUM CHARCOAL METALLIC GRAY	0.070 ga
HW4500A20	1/8NPT SL PIPE PLUG	2.000 ea
MJ1000A02	GREASE, POLYREX EM EXXON	0.050 lb
HW4500A20	1/8NPT SL PIPE PLUG	2.000 ea
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 ea
HA3154A03	STUD, 3/8-16 X 17.75	4.000 ea
40AD2002B01	LEXAN BAFFLE 40 FR OPEN	1.000 ea
40AD2002B01	LEXAN BAFFLE 40 FR OPEN	1.000 ea
LC0005	CONN.DIA.,TY M,9-LD,DUAL VOLT,REVERSING	1.000 ea

NP2094E06B03

NP LABEL W/BARCODE (PREM EFF HVAC MTR)

1.000 ea

40PA1000

PACKAGING GROUP

1.000 ea

**AC Induction Motor Performance Data**

Record # 30818

Typical performance - not guaranteed values

<b>Winding: 40WGX775-R001</b>		<b>Type: 4038M</b>		<b>Enclosure: OPSB</b>	
<b>Nameplate Data</b>			<b>460 V, 60 Hz: High Voltage Connection</b>		
<b>Rated Output (HP)</b>	15		<b>Full Load Torque</b>	66.8 LB-FT	
<b>Volts</b>	230/460		<b>Start Configuration</b>	direct on line	
<b>Full Load Amps</b>	41/20.5		<b>Breakdown Torque</b>	185 LB-FT	
<b>R.P.M.</b>	1180		<b>Pull-up Torque</b>	87.7 LB-FT	
<b>Hz</b>	<b>60 Phase</b>	3	<b>Locked-rotor Torque</b>	105 LB-FT	
<b>NEMA Design Code</b>	<b>B KVA Code</b>	G	<b>Starting Current</b>	116 A	
<b>Service Factor (S.F.)</b>	1.15		<b>No-load Current</b>	10.1 A	
<b>NEMA Nom. Eff.</b>	<b>91.7 Power Factor</b>	75	<b>Line-line Res. @ 25°C</b>	0.67748 Ω	
<b>Rating - Duty</b>	40C AMB-CONT		<b>Temp. Rise @ Rated Load</b>	26°C	
<b>S.F. Amps</b>			<b>Temp. Rise @ S.F. Load</b>	31°C	
			<b>Locked-rotor Power Factor</b>	34	
			<b>Rotor inertia</b>	4.65 LB-FT <sup>2</sup>	

**Load Characteristics 460 V, 60 Hz, 15 HP**

<b>% of Rated Load</b>	<b>25</b>	<b>50</b>	<b>75</b>	<b>100</b>	<b>125</b>	<b>150</b>	<b>S.F.</b>
<b>Power Factor</b>	37	58	69	75	78	79	77
<b>Efficiency</b>	85.5	90.7	91.8	91.8	91.2	89.9	91.4
<b>Speed</b>	1195.6	1191.7	1187.6	1182.8	1177.5	1169.8	1180
<b>Line amperes</b>	11.1	13.4	16.6	20.4	24.8	30.7	23


ABB Motors and Mechanical Inc.

WINDING # 40WGx775

Typical performance - not guaranteed values.


15 HP 3 PH 60 HZ 1180 RPM 460 V 4038M

TORQUES (LB-FT): PO=185 PU=87.7 LR=105 LRA=116

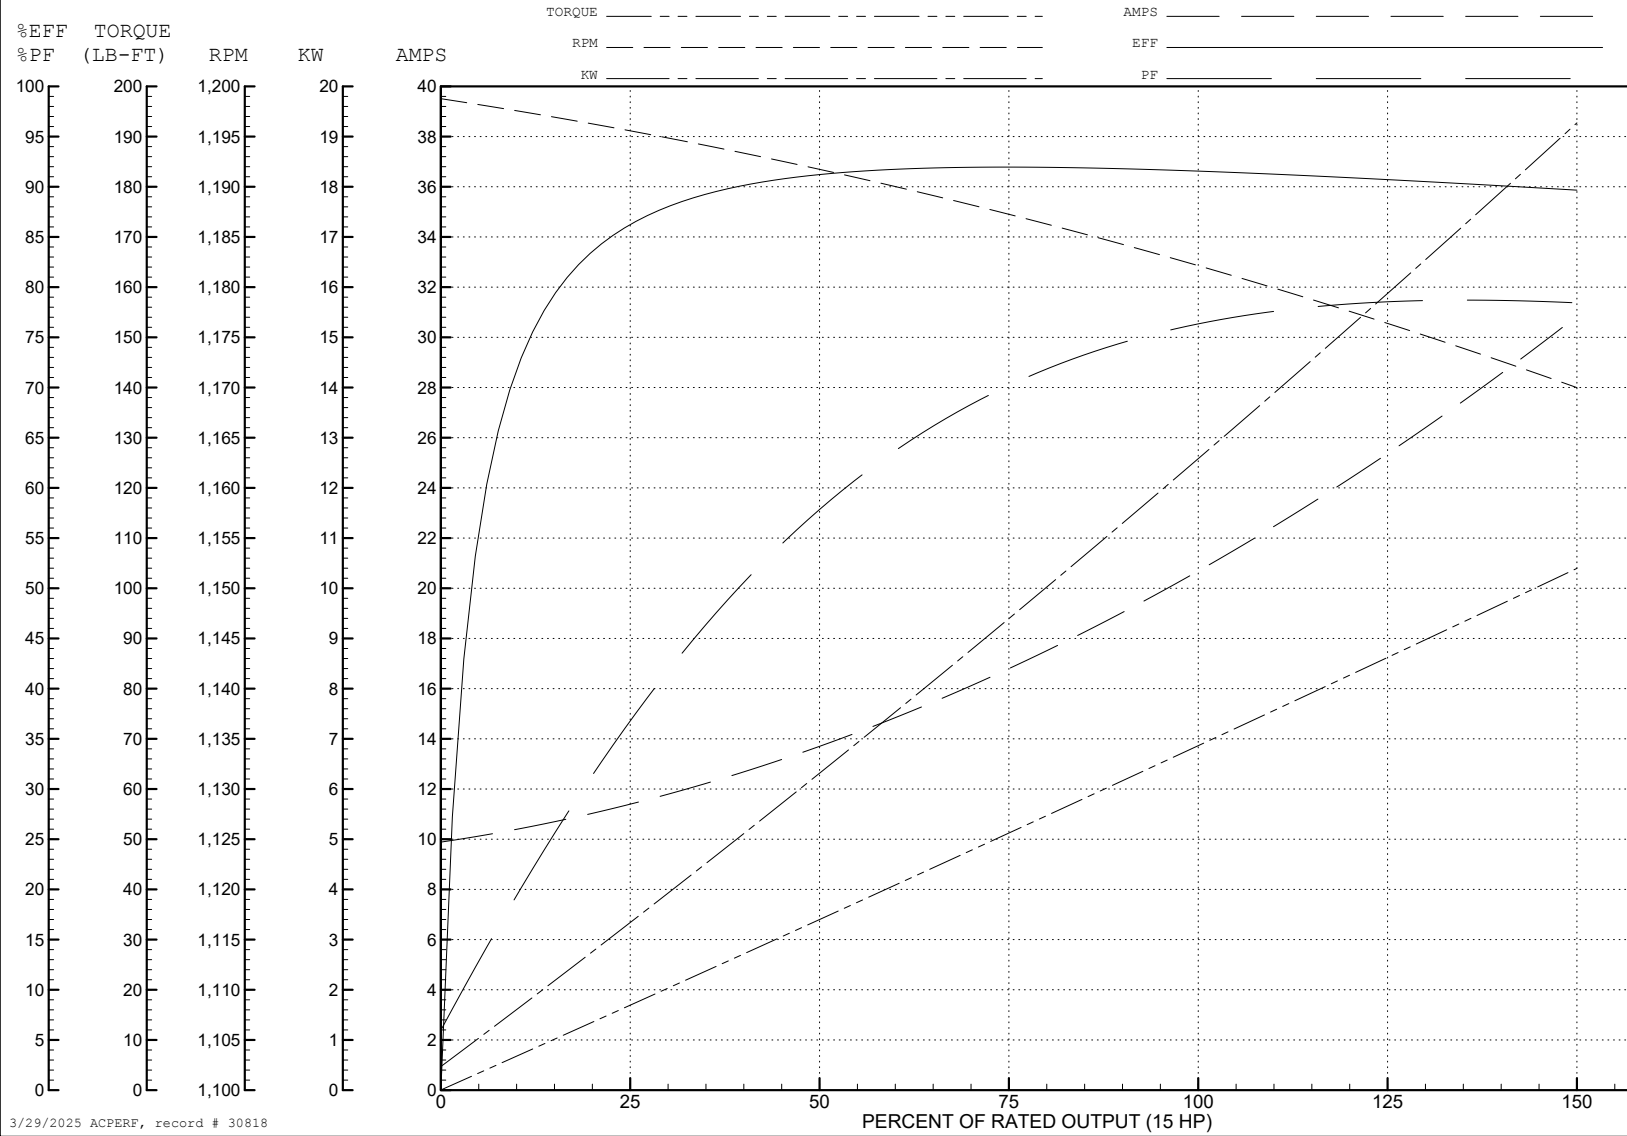


3/29/2025 ACPERF, record # 30818




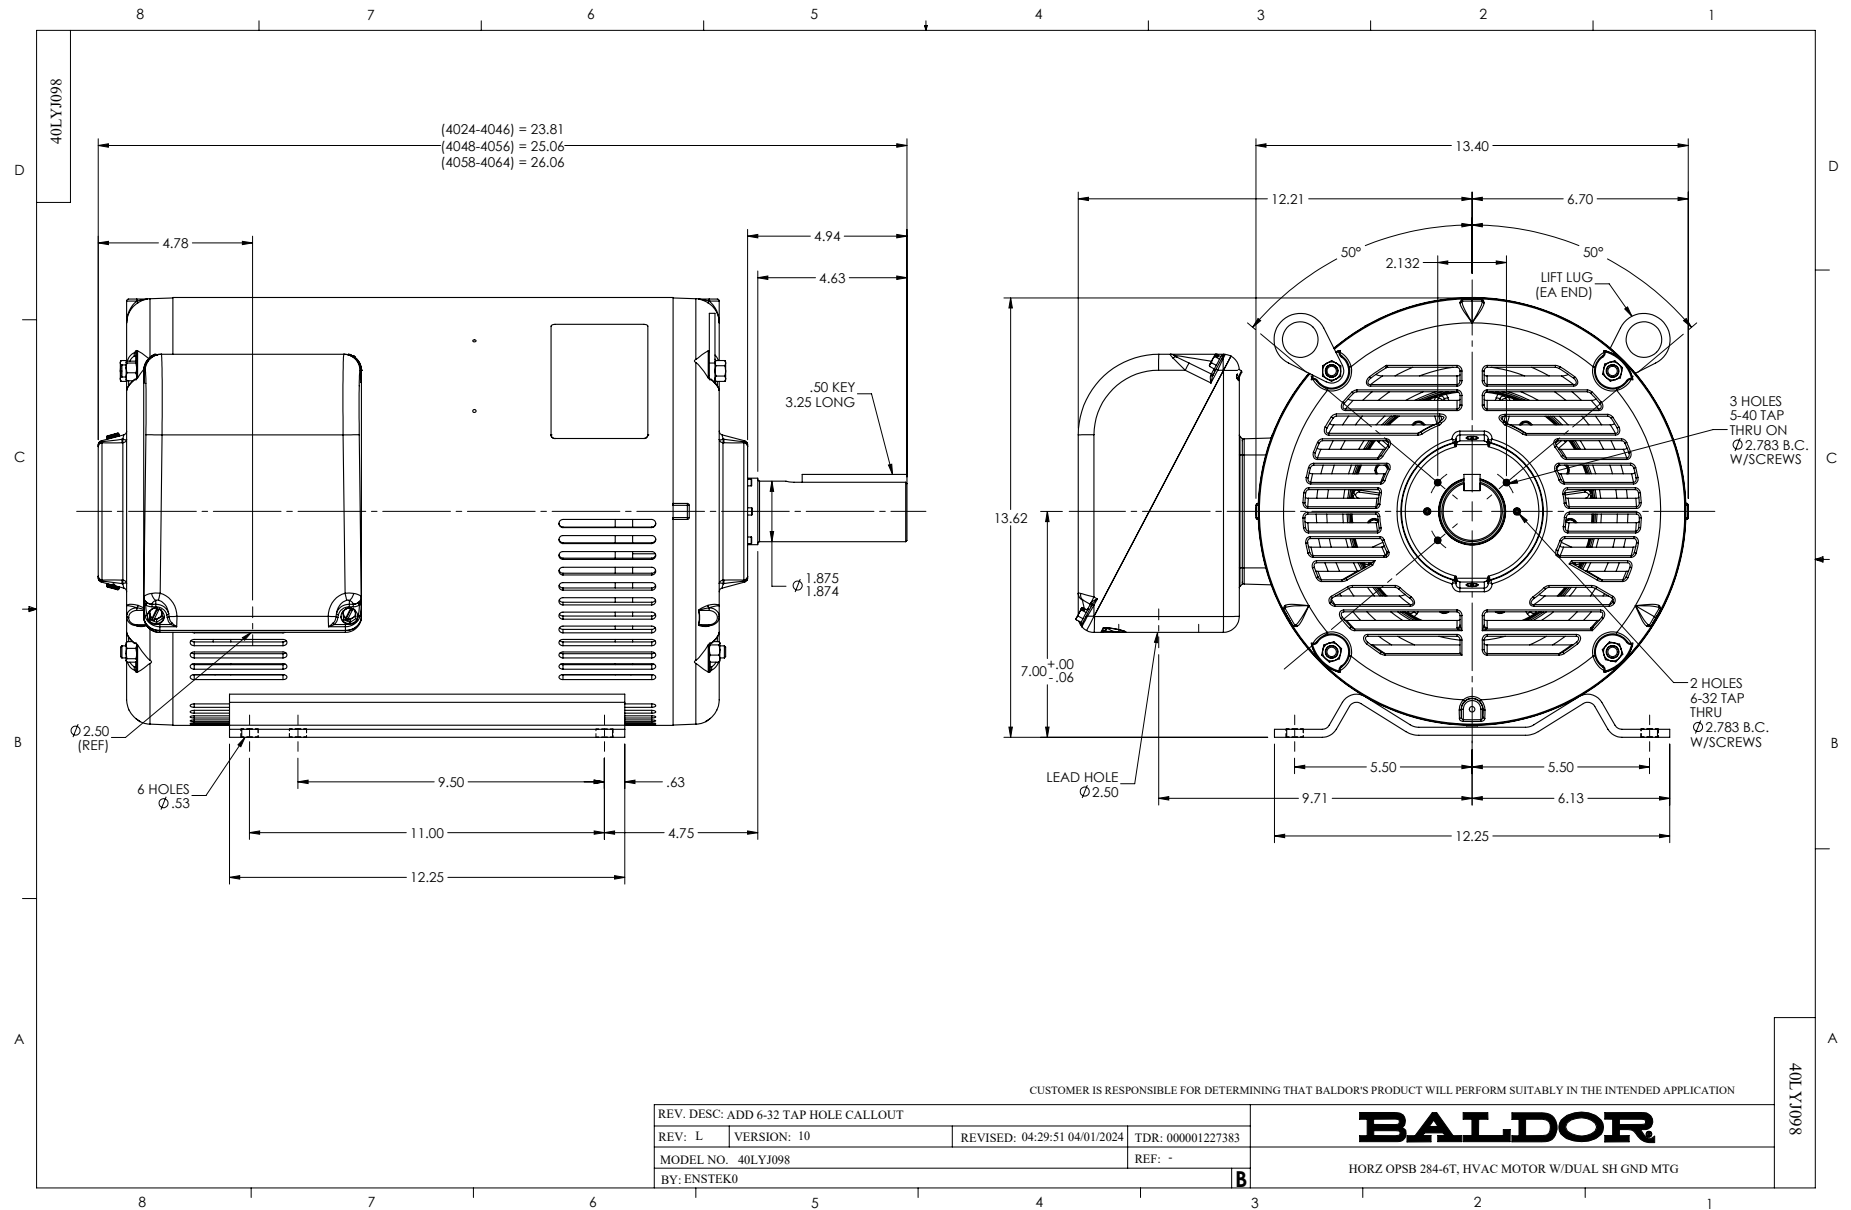

CD0005

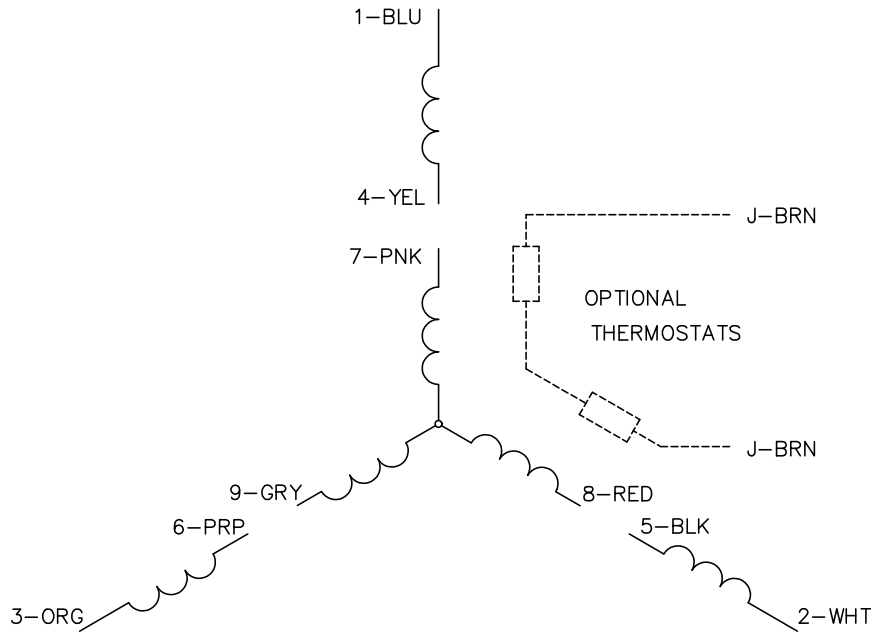


LOW VOLTAGE  
(2Y)



LINE

HIGH VOLTAGE  
(1Y)



LINE

**NOTES:**

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
S00000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS