

BALDOR® • RELIANCE™

Customer information packet

EL11317

2HP, 3470RPM, 1PH, 60HZ, 56H, 3540LC, ODP, F1, N

Class - None

Division - Not Applicable

Specifications

| | |
|--------------------------------|---|
| Enclosure | OPEN |
| Frame | 56H |
| Frame Material | Steel |
| Frequency | 60.00 Hz |
| Haz Area Class and Group | None |
| Haz Area Division | Not Applicable |
| Motor Letter Type | Cap Start, Cap Run |
| Output @ Frequency | 2.000 HP @ 60 HZ |
| Phase | 1 |
| Synchronous Speed @ Frequency | 3600 RPM @ 60 HZ |
| Voltage @ Frequency | 115.0 V @ 60 HZ 230.0 V @ 60 HZ |
| Agency Approvals | CURUSEEV |
| Ambient Temperature | 40 °C |
| Auxillary Box | No Auxillary Box |
| Auxillary Box Lead Termination | None |
| Base Indicator | Rigid |
| Bearing Grease Type | Polyrex EM (-20F +300F) |
| Blower | None |
| Current @ Voltage | 15.600 A @ 115.0 V 7.800 A @ 230.0 V |
| Design Code | L |
| Drip Cover | No Drip Cover |
| Duty Rating | CONT |
| Efficiency @ 100% Load | 82.9 % |
| Electrically Isolated Bearing | Not Electrically Isolated |
| Feedback Device | NO FEEDBACK |
| Front Face Code | Standard |
| Front Shaft Indicator | None |
| Heater Indicator | No Heater |
| High Voltage Full Load Amps | 7.8 a |
| Insulation Class | F |

Part detail

| | |
|--------------|------------|
| Revision | K |
| Type | AC |
| Mech. spec. | 35E007 |
| Base | |
| Status | PRD/A |
| Elec. spec. | 35WGN674 |
| Layout | 35LYE007 |
| Eff. date | 05-16-2024 |
| CD Diagram | CD0055 |
| Poles | 02 |
| Leads | 6#16 |
| Proprietary | False |
| Created date | 03-14-2014 |

| | |
|--------------------------------------|---------------------|
| Inverter Code | Not Inverter |
| KVA Code | G |
| Lifting Lugs | No Lifting Lugs |
| Locked Bearing Indicator | No Locked Bearing |
| Motor Lead Exit | Ko Box |
| Motor Lead Quantity/Wire Size | 6 @ 16 AWG |
| Motor Lead Termination | Flying Leads |
| Motor Standards | NEMA |
| Motor Type | 3540LC |
| Mounting Arrangement | F1 |
| Number of Poles | 2 |
| Overall Length | 14.00 IN |
| Power Factor | 99 |
| Product Family | General Purpose |
| Pulley End Bearing Type | Ball |
| Pulley Face Code | Standard |
| Pulley Shaft Indicator | Standard |
| Rodent Screen | None |
| RoHS Status | ROHS COMPLIANT |
| Service Factor | 1.15 |
| Shaft Diameter | 0.625 IN |
| Shaft Extension Location | Pulley End |
| Shaft Ground Indicator | No Shaft Grounding |
| Shaft Rotation | Reversible |
| Shaft Slinger Indicator | No Slinger |
| Speed | 3470 rpm |
| Speed Code | Single Speed |
| Starting Method | Direct on line |
| Thermal Device - Bearing | None |
| Thermal Device - Winding | None |
| Vibration Sensor Indicator | No Vibration Sensor |
| Winding Thermal 1 | None |
| Winding Thermal 2 | None |


Nameplate

| NP3155L | | | | | | | | | |
|-----------------------|--------------|-------------|------------|------------|---|-----------|---|--|--|
| CAT.NO. | EL11317 | | | | | | | | |
| SPEC. | 35E007N674G1 | | | | | | | | |
| HP | 2 | | | | | | | | |
| VOLTS | 115/230 | | | | | | | | |
| AMP | 15.6/7.8 | | | | | | | | |
| RPM | 3470 | | | | | | | | |
| FRAME | 56H | | HZ | 60 | | PH | 1 | | |
| SER.F. | 1.15 | CODE | G | DES | L | CL | F | | |
| F.L. AVG. EFF. | 82.9 | PF | 99 | | | | | | |
| RATING | 40C AMB-CONT | | | | | | | | |
| CC | | | | | | | | | |
| DE | 6205 | | ODE | 6203 | | | | | |
| ENCL | OPEN | SN | | | | | | | |


Parts list

| Part number | Description | Quantity |
|-------------|--|----------|
| SA278104 | SA 35E007N674G1 | 1.000 ea |
| RA264649 | RA 35E007N674G1 | 1.000 ea |
| OC3070C09 | AEROVOX #Z24P247OM22A1 OIL CAP 70MFD/240 | 1.000 ea |
| EC1645B06 | ELEC CAP 165V 2.0 X 4.3 | 1.000 ea |
| WD3006A01 | RSS-2-103JT 2W 10K RES. METAL OXIDE 5% | 1.000 ea |
| NS2512A01 | INSULATOR, CONDUIT BOX X | 1.000 ea |
| 35CB3007 | 35 CB CASTING W/.88 DIA. LEAD HOLE | 1.000 ea |
| 51XB1016A07 | 10-16 X 7/16 HXWSSLD SERTYB | 2.000 ea |
| 11XW1032G06 | 10-32 X .38, TAPTITE II, HEX WSHR SLTD U | 1.000 ea |
| 35EP3209G00 | MASTER ODE,203 BRG | 1.000 ea |
| 51XW0832A07 | 8-32 X .44, TAPTITE II, HEX WSHR SLTD SE | 2.000 ea |
| NS2501A02 | INSULATOR, CAPACITOR BOX | 1.000 ea |
| 35CB3801 | CAPACITOR COVER, CAST | 1.000 ea |
| HA7010 | CAPACITOR RETENTION CLAMP | 1.000 ea |
| 51XB1016A08 | 10-16X 1/2HXWSSLD SERTYB | 2.000 ea |
| HW5100A03 | WAVY WASHER (W1543-017) | 1.000 ea |
| 35EP3210B00 | MASTER DE,205 BRG,1.000SH | 1.000 ea |
| XY1032A02 | 10-32 HEX NUT DIRECTIONAL SERRATION | 4.000 ea |
| 35CB4521 | 35 LIPPED CB LID (GALV & PHOSPH) | 1.000 ea |
| 51XW0832A07 | 8-32 X .44, TAPTITE II, HEX WSHR SLTD SE | 4.000 ea |
| HW2501D13 | KEY, 3/16 SQ X 1.375 | 1.000 ea |
| HA7000A04 | KEY RETAINER 0.625 DIA SHAFTS | 1.000 ea |
| 85XU0407S04 | 4X1/4 U DRIVE PIN STAINLESS | 2.000 ea |
| MJ1000A02 | GREASE, POLYREX EM EXXON | 0.050 lb |
| MG1050Y01 | CELEROL BALDOR GOLD *** NLA IN 5 GALLON | 0.017 ga |
| HA3100A26 | THRUBOLT 10-32 X 11.500 | 4.000 ea |
| 34GS5003 | FOAM SLEEVE, ID = 2 1/16" X 3 3/8" | 1.000 ea |
| WD1000A15 | 3-520132-2 AMP FLAG (4M/RL NON-CANC/NON- | 4.000 ea |
| SP5181A01 | MODEL 35 LC TORQ STAT SWITCH LEAD ASSY | 1.000 ea |
| LC0001A01 | CONN LABEL / WARNING LABEL (LC0001 / LB1 | 1.000 ea |
| NP3155L | ALUM SUPER-E UL CC "SEMS" | 1.000 ea |

| | | |
|------------|---------------------------------------|----------|
| 36PA1000 | PKG GRP, PRINT PK1016A06 | 1.000 ea |
| FE-0000001 | ZRTG FE ASSEMBLY | 1.000 ea |
| PE-0000001 | ZRTG PE ASSEMBLY | 1.000 ea |
| MN416A01 | TAG-INSTAL-MAINT no wire (2500bx)4/22 | 1.000 ea |

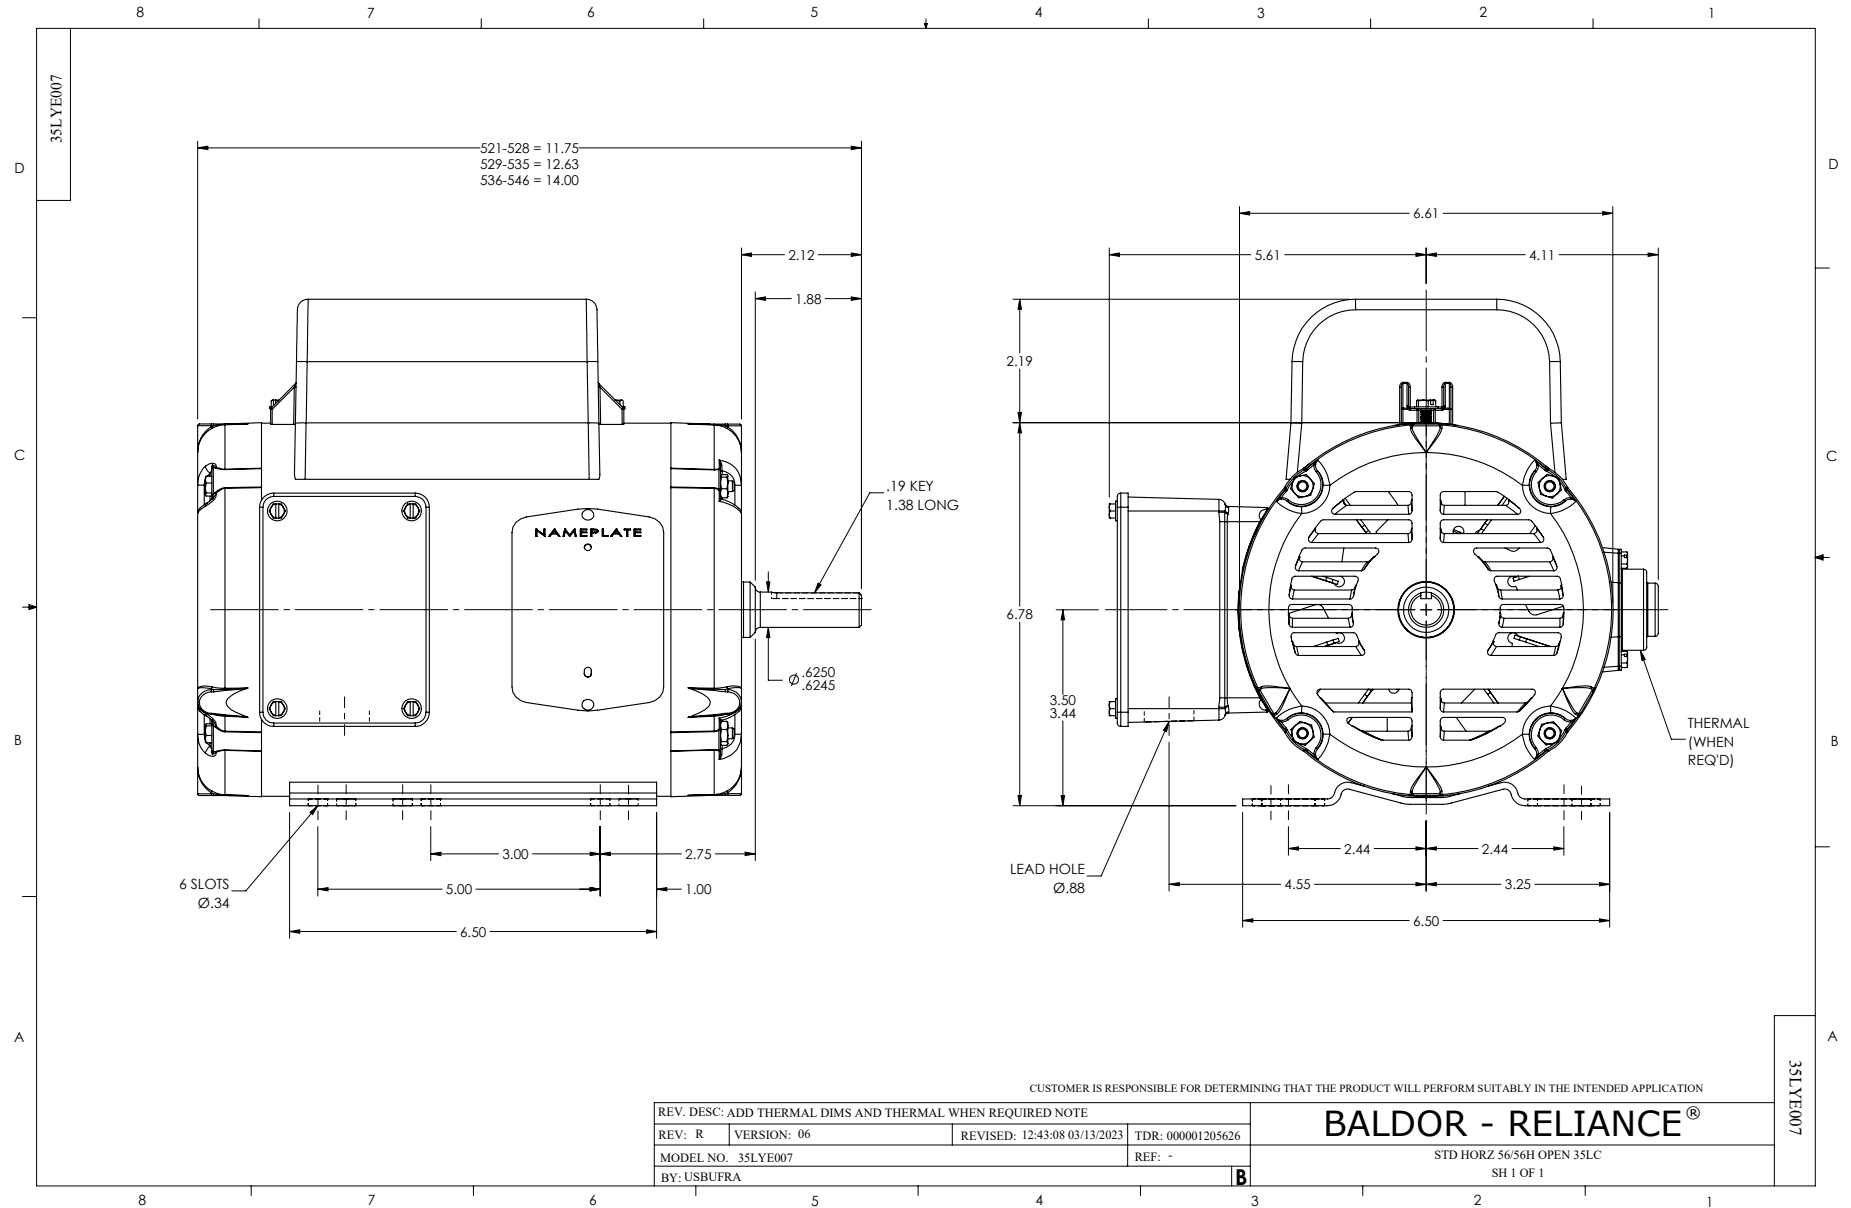

CD0055

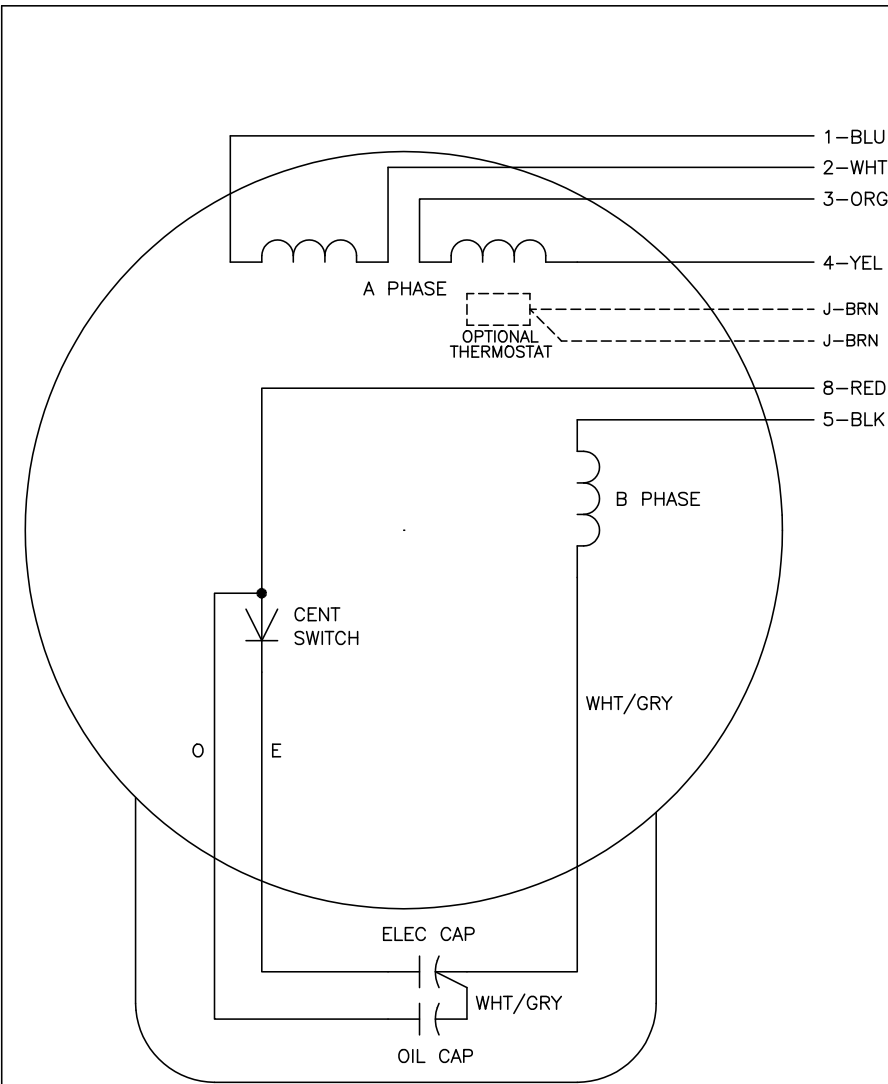

| | LINE A | LINE B | JOIN |
|----------|--------|--------|-------|
| HIGH STD | 1 | 4,5 | 2,3,8 |
| HIGH OPP | 1 | 4,8 | 2,3,5 |
| LOW STD | 1,3,8 | 2,4,5 | - |
| LOW OPP | 1,3,5 | 2,4,8 | - |

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0055

| | | | |
|---|---------|------------------------|--------------|
| REV. DESC: REVISE TO SHOW OPTIONAL COLORS | | | |
| REV. LTR: D | BY: JLP | REVISED: 04/08/99 1:17 | TDR: 0178636 |
| C00000 | | FILE: AAA00007414 | MDL: - |
| | | MTL: - | |

BALDOR ELECTRIC Co.

TYPE LC, DV, REV, 6 LEADS