



Customer information packet

EL11301M

.33HP, 1740RPM, 1PH, 60HZ, 56, 3418LC, OPEN, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	56
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.330 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 115.0 V @ 60 HZ
Agency Approvals	CURUSEEV
Ambient Temperature	40 °C
Auxillary Box	No Auxillary Box
Auxillary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.400 A @ 115.0 V 1.800 A @ 208.0 V 1.700 A @ 230.0 V
Design Code	N
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	72.4 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	1.7 a

Part detail

Revision	K
Type	AC
Mech. spec.	34F353
Base	
Status	PRD/A
Elec. spec.	34WGR216
Layout	34LYF353
Eff. date	10-29-2024
CD Diagram	CD0320
Poles	04
Leads	7#18
Proprietary	False
Created date	09-30-2014

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	7 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3418LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	10.13 IN
Power Factor	85
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.35
Shaft Diameter	0.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1740 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Manual Thermal Overload
Winding Thermal 1 Location	SB

Winding Thermal 2

None

Nameplate

NP3273L									
CAT.NO.	EL11301M								
SPEC.	34F353R216G1								
HP	.33								
VOLTS	115/230								
AMP	3.4/1.7								
RPM	1740								
FRAME	56	HZ	60	PH	1				
SER.F.	1.35	CODE	K	DES	N	CL	F		
F.L. AVG. EFF.	72.4	PF	85						
RATING	40C AMB-CONT								
CC								USABLE AT 208V	N/A
DE	6203	ODE	6203						
ENCL	OPEN	SN							
SFA 4.4/2.2									

Parts list

Part number	Description	Quantity
SA287660	SA 34F353R216G1	1.000 ea
RA273868	RA 34F353R216G1	1.000 ea
OC3016F12SP	CYL OIL CAP 16MFD/370V	1.000 ea
EC1145A02	ELEC CAP 115V 1.4 X 3.3 X	1.000 ea
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 ea
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 ea
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 ea
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	2.000 ea
SP1006A01	INSULATOR MODEL 35 SWITCH	1.000 ea
34EP3210A01SP	FR ENDPLATE, MACH	1.000 ea
34CB3801	CAPACITOR BOX, DIE CAST	1.000 ea
51XB1214A08	12-14 X 1/2HX WS SL SR TYBX	2.000 ea
34GS5003A01	FOAM SLEEVE, ID = 2 1/16" X 4 3/8"	1.000 ea
HW5100A03	WAVY WASHER (W1543-017)	1.000 ea
34EP3212A02	PU ENDPLATE, MODEL 34 OPEN	1.000 ea
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 ea
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 ea
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 ea
HW2501D13	KEY, 3/16 SQ X 1.375	1.000 ea
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 ea
MG1050Y01	CELEROL BALDOR GOLD *** NLA IN 5 GALLON	0.014 ga
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 ea
SP5051B17	MDL 34 TORQ STAT SW,TYPE LC, STD F1 & F2	1.000 ea
HA3100A44	THRUBOLT 10-32 X 8.000	4.000 ea
MN416A01	TAG-INSTAL-MAINT no wire (2500bx)4/22	1.000 ea
LB1087	LABEL,MANUAL RESET (ROLL LABEL)	1.000 ea
LB1624	COMBINED WARNING LABEL, ISO/ANSI PICTOGR	1.000 ea
LC0269	1PH,DV,REV,THERMAL,7 LD,L.AMP THRU HTR H	1.000 ea
NP3273L	ALUM SUPER-E THERMALLY PROTECTED	1.000 ea
35PA1066	PKG GRP, PRINT PK1008A06	1.000 ea

AC Induction Motor Performance Data

Record # 62083

Typical performance - not guaranteed values

Winding: 34WGR216-R002		Type: 3418LC	Enclosure: OPEN	
Nameplate Data			115 V, 60 Hz: Low Voltage Connection	
Rated Output (HP)	.33	Full Load Torque	0.996 LB-FT	
Volts	115/230	Start Configuration	direct on line	
Full Load Amps	3.4/1.7	Breakdown Torque	3.18 LB-FT	
R.P.M.	1740	Pull-up Torque	2.29 LB-FT	
Hz	60 Phase	Locked-rotor Torque	4.26 LB-FT	
NEMA Design Code	N KVA Code	Starting Current	24.1 A	
Service Factor (S.F.)	1.35	No-load Current	1.69 A	
NEMA Nom. Eff.	72.4 Power Factor	Line-line Res. @ 25°C	1.7428 Ω A Ph 5.5858 Ω B Ph	
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	35°C	
S.F. Amps	4.4/2.2	Temp. Rise @ S.F. Load	42°C	

Load Characteristics 115 V, 60 Hz, 0.33 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	72	81	85	87	89	88
Efficiency	32.1	64.5	69.3	73.5	76.7	73.7	75.5
Speed	1780.3	1770	1754.7	1739.9	1725.3	1703.3	1716
Line amperes	1.96	2.31	2.87	3.43	3.99	4.81	4.32


ABB Motors and Mechanical Inc.

WINDING # 34WGR216


Typical performance - not guaranteed values.

0.33 HP 1 PH 60 HZ 1740 RPM 115 V 3418LC


TORQUES (LB-FT): PO=3.18 PU=2.29 LR=4.26 LRA=24.1

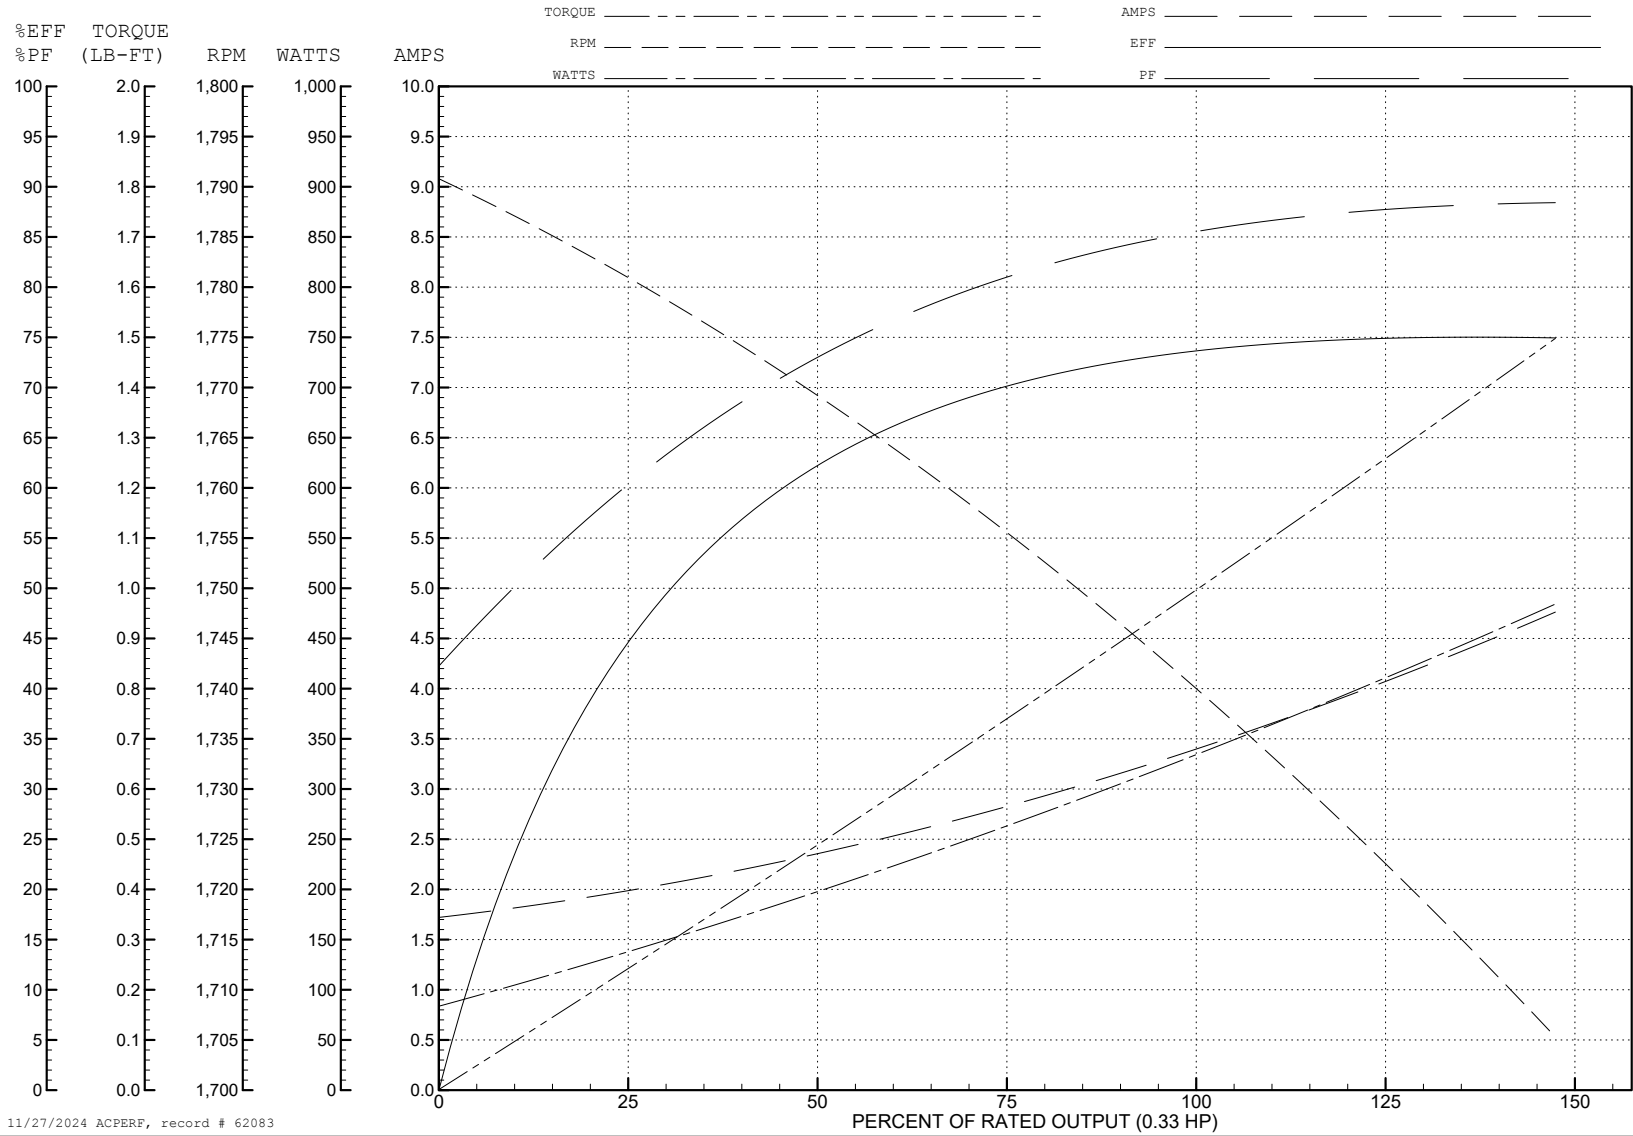

11/27/2024 ACPERF, record # 62083

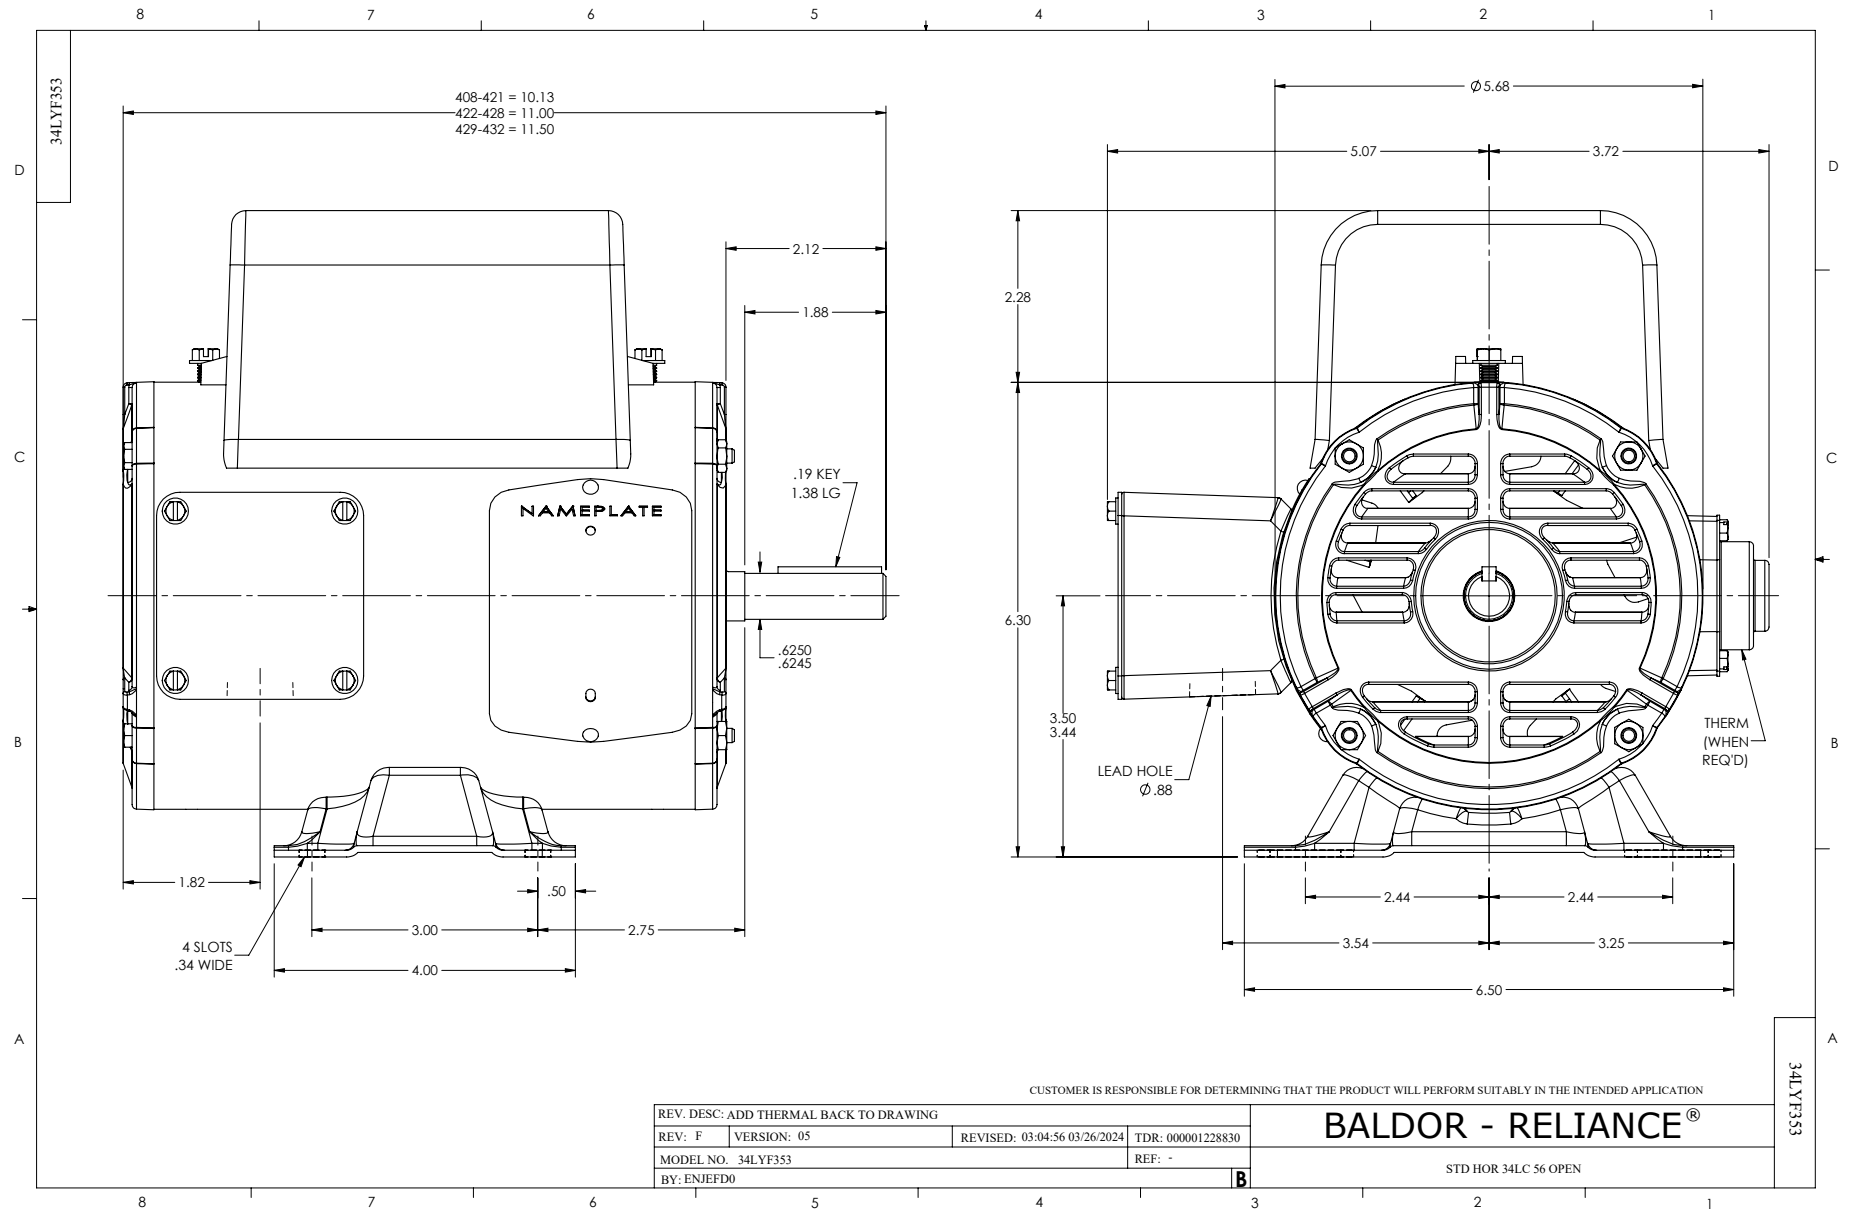

CD0320

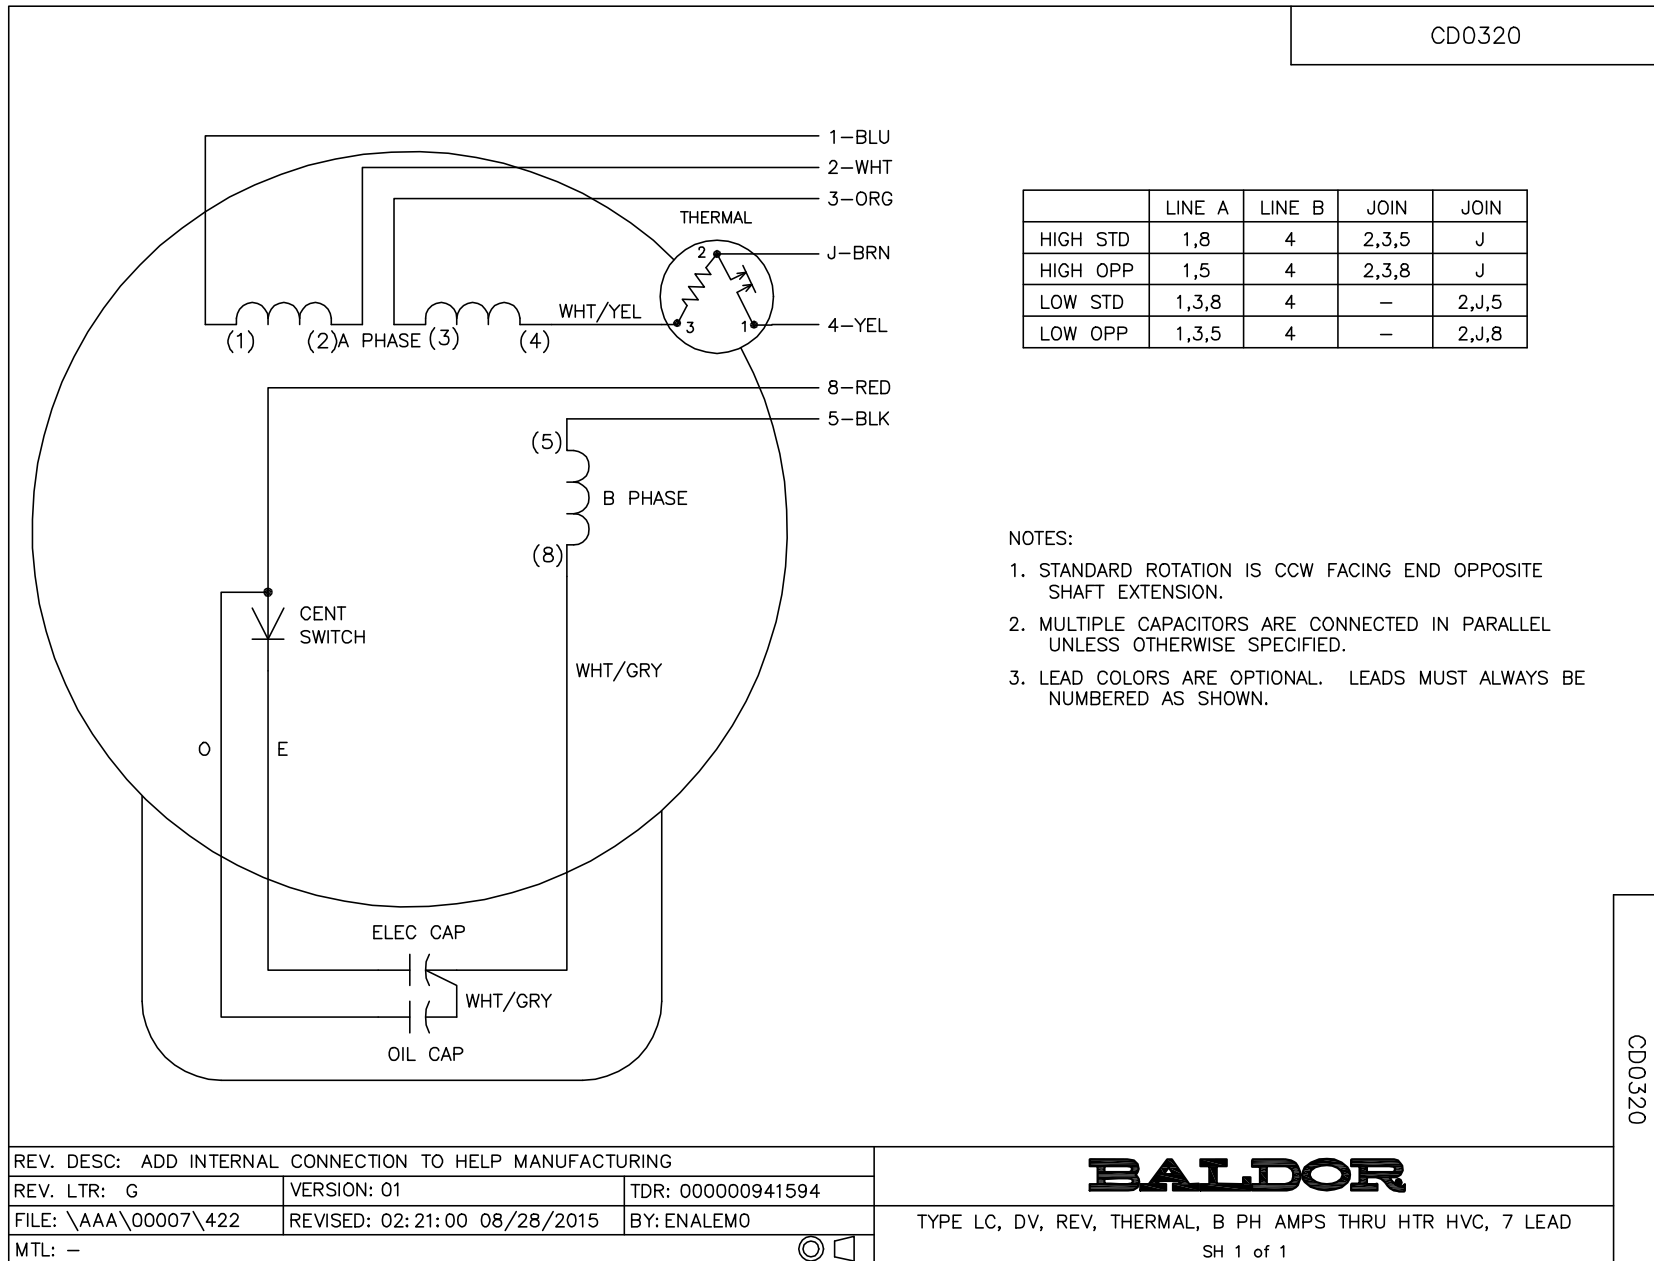

	LINE A	LINE B	JOIN	JOIN
HIGH STD	1,8	4	2,3,5	J
HIGH OPP	1,5	4	2,3,8	J
LOW STD	1,3,8	4	-	2,J,5
LOW OPP	1,3,5	4	-	2,J,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0320

REV. DESC: ADD INTERNAL CONNECTION TO HELP MANUFACTURING		
REV. LTR: G	VERSION: 01	TDR: 00000941594
FILE: \AAA\00007\422	REVISED: 02:21:00 08/28/2015	BY: ENALEMO
MTL: -		

BALDOR

TYPE LC, DV, REV, THERMAL, B PH AMPS THRU HTR HVC, 7 LEAD
SH 1 of 1